





Sliding Door Framing and Seal Instructions

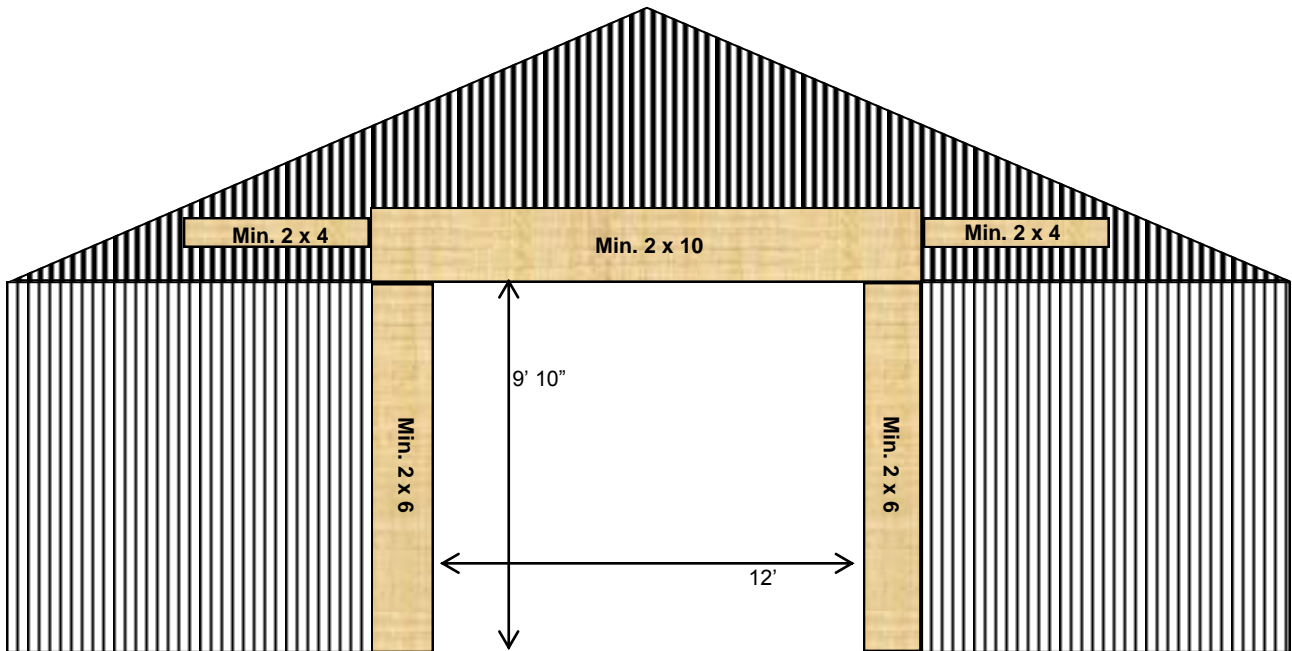

Above is the necessary wood frame work for the Eagan Sliding Door. It requires a minimum 2x6 on each side and a minimum 2x10 header across the top. You may then use 2x4's to extend out from each side of the header for the track installation. Once complete, the remaining rough opening should be exactly 12' x 9'10".

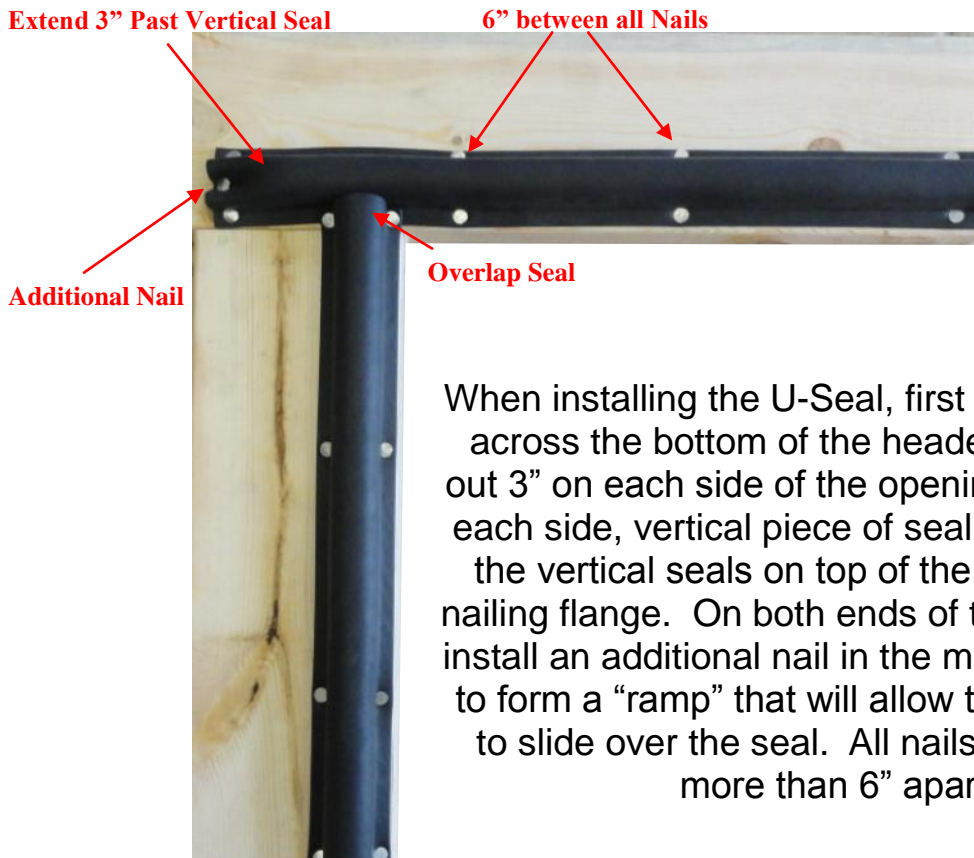

When installing the U-Seal, first install the piece across the bottom of the header, extending it out 3" on each side of the opening. Then install each side, vertical piece of seal by overlapping the vertical seals on top of the header seal's nailing flange. On both ends of the header seal, install an additional nail in the middle of the seal to form a "ramp" that will allow the door panels to slide over the seal. All nails should be no more than 6" apart.